


- All reports are based on a single unit. The loading will double if both products are placed at one end.

■ Technical Specifications



| | | |
|------------------------------------|-------------------------|-------|
| Sample-Modular Model | MUB122 (MUB1+MUB2+MUB2) | |
| Test Requested | Load Compression at 50% | |
| Test Speed | 0.8 in/min | |
| Initial dimension (Inch) | Outer diameter | 2.96 |
| | Length | 4.58 |
| After exposure dimension (Inch) | Outer diameter | 2.99 |
| | Length | 4.50 |
| Change in dimension (%) | Outer diameter | 0.862 |
| | Length | 1.726 |
| Load at 50% compression (kN / lbf) | 12.15 kN / 2,731 lbf | |
| SGS Visual Observation | No damages observed. | |

■ MUB122 Compression Test by SGS Lab

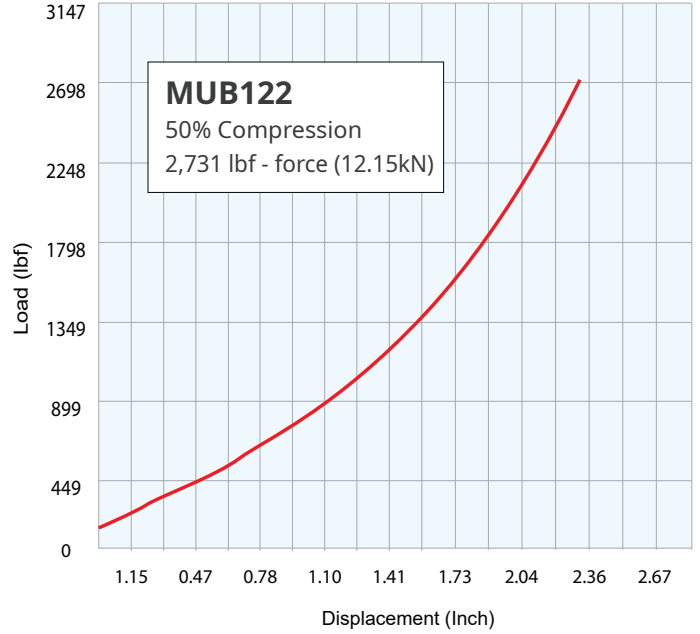

SAMPLE AS RECEIVED



TEST SPECIMEN



TEST SETUP



TESTED SAMPLE