

Universal Bump Stop Technical Report

WARNING: Common automotive safety practices are required during installation. Professionals with mechanical knowledge are recommended.

Rubbershox is not responsible nor be held liable for incorrect or faulty installations.


• All reports are based on a single unit. The loading will double if both products are placed at one end.

■ Technical Specifications



Sample-Modular Model	UB12223A (UB1+UB2+UB2+UB2+UB3A)	
Test Requested	Load Compression at 50%	
Test Speed	0.8 in/min	
Initial dimension (Inch)	Outer diameter	3.99
	Length	8.11
After exposure dimension (Inch)	Outer diameter	4.02
	Length	8.02
Change in dimension (%)	Outer diameter	0.788
	Length	1.019
Load at 50% compression (kN / lbf)	42.72 kN / 9,622 lbf	
SGS Visual Observation	No damages observed.	

■ UB12223A Compression Test by SGS Lab

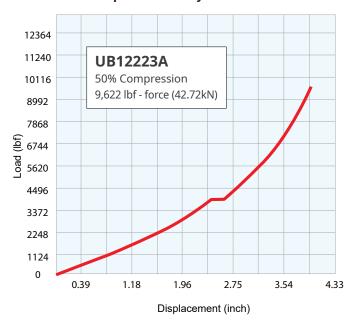









SAMPLE AS RECEIVED

TEST SPECIMEN

TEST SETUP

TESTED SAMPLE