

## Modular Universal Bump Stop Technical Report

WARNING: Common automotive safety practices are required during installation. Professionals with mechanical knowledge are recommended.

Rubbershox is not responsible nor be held liable for incorrect or faulty installations.


• All reports are based on a single unit. The loading will double if both products are placed at one end.

## **■** Technical Specifications



Sample-Modular Model	UB12F3F (UB1+UB2F+UB3F)
Test Requested	Load Compression at 50%
Test Speed	0.8 in/min
Load at 50% compression (Single)	15.44 kN / 3,471 lbf
Load at 50% compression (Pair)	30.88 kN / 6,942 lbf
SGS Visual Observation	No damages observed.

## ■ UB12F3F Compression Test by SGS Lab

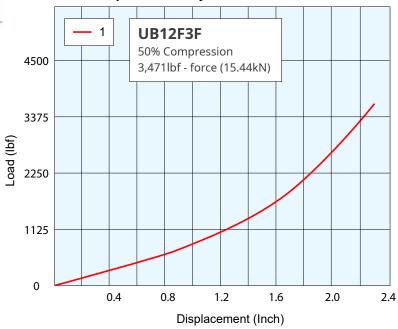









SAMPLE AS RECEIVED

TEST SPECIMEN

TEST SETUP

TESTED SAMPLE