
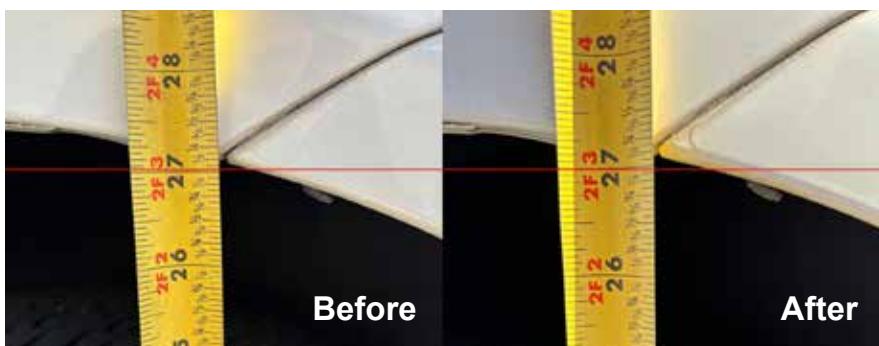


**Front Coil Springs : CSB Series Size A (CSB-A-R) Rear Coil Springs : CSB Series Size E (CSB-E-R)**


**Ground Lifting Height : 1" in the front and 1/8" in the rear**

**IMPORTANT NOTICE:** INSTALLERS SHOULD APPLY COMMON AUTOMOTIVE SAFETY PRACTICES WHEN RAISING, LOWERING AND WORKING ON VEHICLES, ALWAYS WEARING SAFETY GLASSES, USING BOTH HYDRAULIC JACK AND JACK STAND DURING THE INSTALLATION. We recommend that this installation be done by a professional or person with auto mechanical knowledge.

After-installation ground clearance measurement. Lift 1" in the front, and 1/8" in the rear.

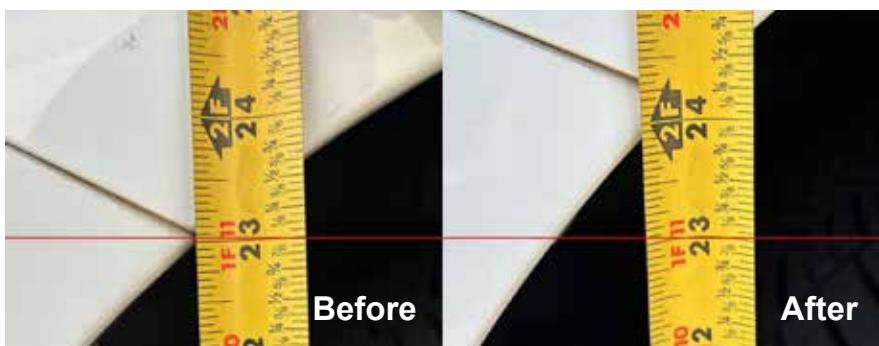

Use template to determine the size of the buffer: Front end: A

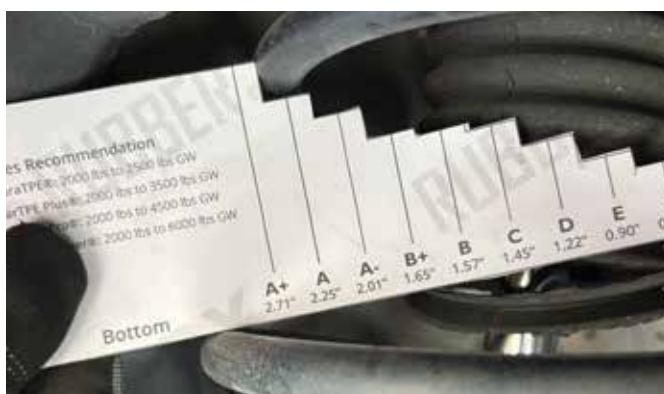

Rear coil spring gap is very narrow, and size E is tight fit. A standard screwdriver will be very helpful to pull the outside ring out of the coil, so the buffer can sit on the coil.

