

Installation Case Study

Front Coil Springs: Modular Universal Coil Spring Buffer UCSB12344 (UCSB1 and UCSB2), UCSBH12344 (UCSBH1 and UCSBH2) Ground Lifting Height: 0.5"

IMPORTANT NORICE: INSTALLERS SHOULD APPLY COMMON AUTOMOTIVE SAFETY PRACTICES WHEN RAISING, LOWERING AND WORKING ON VEHICLES, ALWAYS WEARING SAFTY GLASSES, USING BOTH HYDRAULIC JACK AND JACK STAND DURING THE INSTALLATION. We recommend that this installation be done by a professional or person with auto mechanical knowledge.




Installed UCSBH12344 on the front coil spring. UCSBH1 and UCSBH2 modules are used for this installation.





Left: UCSBH12344 – Using UCSBH1 and UCSBH2 Right: UCSBH12344 – Using UCSBH1 and UCSBH2

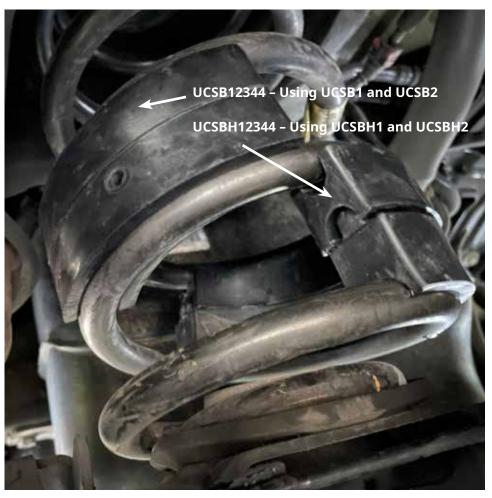

Add another 0.5" ground clearance to 39"